


USER MANUAL EASYCHANGE FOR CAN CLI-8 / PGI-5

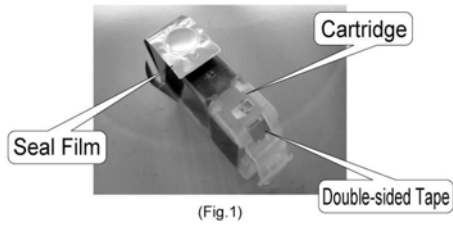


(Fig.1)

I0001133

Operation Procedures:


1. Take out the chip from the original cartridge carefully (as shown in Fig.2).

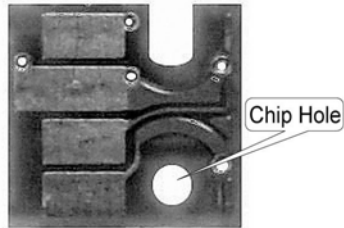

(Fig.2)

2. Draw out EasyChange Cartridge from the box and tear off the anti-adhesive tape on the cartridge (as shown in Fig.1). Place the chip on the cartridge, fix the position by having the chip rod (as shown in Fig.3) penetrating the chip hole (as shown in Fig.4). Press gently.

Note: Make sure the chip is attached firmly and in a correct position.

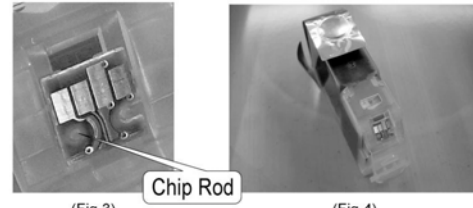

(Fig.3)

(Fig.4)

3. Peel the seal film on the cartridge, install the cartridge and start to print.

Attention: The chip will not measure ink volume. Users are required to check the content regularly and replace the cartridge before ink is used up. Printing with empty cartridge will damage or destroy the print head of the printer.

All brand names and trade marks are the properties of their respective holders and are referred to here for descriptive purposes only. We are not associated with any printer and/or original printing supplies manufacturers.